


## LENSEC LX266D Network Video Appliance

### Product Datasheet

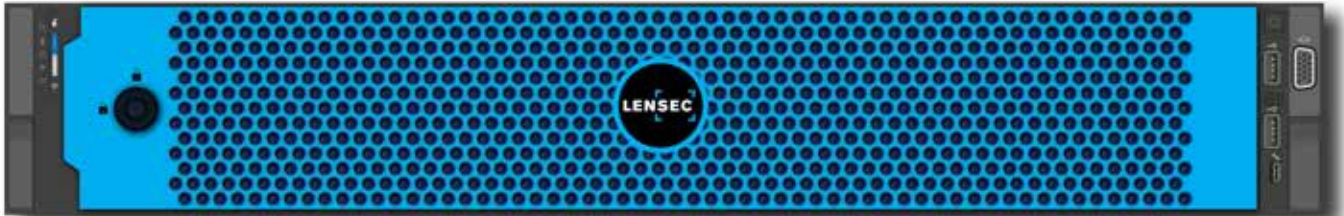

### Introduction

LENSEC LX266D is an affordable dual socket 2U rack appliance designed for enterprise deployments running on top of Microsoft Windows Server.

This surveillance-optimized server support up to 225 cameras streaming and recording at high resolution. Cameras and security systems licenses are obtained separately.

LENSEC LX266D comes pre-downloaded and enhanced with Perspective VMS®, which eliminate deployment cost and enable instant-use of appliance.

### Designed for Large Environment

LENSEC LX266D fulfill the need for managing a higher number of cameras with high storage capability and high performance into a single appliance.

LENSEC LX266D is the ideal appliance as central management server, remote site NVR and standalone deployments.

LENSEC LX266D offers up to 18 x 3.5" hot plug hard drives with a total storage capacity of 288 TB. Windows operating system, VMS system and video data are protected from loss with RAID options to ensure critical functions high availability.

### High Performance

LENSEC LX266D accelerates your network surveillance infrastructure response with improved performance by using Intel Xeon Silver series processors.

OS/VMS loaded on (2) M.2 SSD sticks for faster booting and higher applications response time. It handles well the system management role with high response to users' requests, third-party security integration services and high video recording rates.

### Key Features

- Windows Server® 2019
- 2x Intel® Xeon® Silver Series
- Up to 660 Mbps throughput
- Up to 288 TB NL-SAS drives
- Redundant Power
- RAID Options: 0, 1, 5, 6, 10
- iDRAC Express
- 5 Year, Next-Business Day Warranty

## LENSEC LX266D NVA Technical Specifications

### General information

#### Operating System

Microsoft Windows Server® 2019

#### Processor

2x Intel® Xeon® Silver 4216 2.1GHz, 16C/32T

#### Memory

32 GB (4 x 8 GB)

#### Power Supplies

Dual Hot Plug 1100W Power Supply

#### Networking

2 x 10 GbE ports  
2 x 1 GbE ports

#### GPU (Optional)

NVIDIA®T400, NVIDIA®T1000

#### Performance

Validated 225 cameras\*

#### Remote Users

No license limitation

#### VMS Edition Support

PVMS Express, Standard, Professional, Enterprise

#### Operation Mode

Standalone/Centralized/Distributed

#### Support and Warranty

5-Year Next-Business Day, Keep your Hard Drive Warranty,  
Customer self-repair for GPU

### Storage

#### VMS/OS Disk

2 x 240 GB M.2 SSD, Raid 1

#### Storage Bays

Up to 18 x 3.5" hot-plug

#### Storage Capacity

Up to 288 TB

#### RAID Controller

0, 1, 5, 6, 10

### Mechanical

#### Form Factor

2U

#### Dimensions Form Factor

17.08" (434 mm) x 26.72" (678.8 mm) x 3.4" (86.8 mm)

#### Temperature

(Min) 50°F - (Max) 95° F [(Min) 10°C - (Max) 35° C

#### Humidity

10 ~ 80% (non-condensing)

#### Maximum Weight

33.1 kg (73 lbs)


### Storage Configuration

Models	Bays	Max. Storage Capacity
LX266D-192TB-16	12 x 3.5" hot-plug NL-SAS	192 TB (16 TB x 12)
LX266D-216TB-12	18 x 3.5" hot-plug NL-SAS	216 TB (12 TB x 18)
LX266D-288TB-16	18 x 3.5" hot-plug NL-SAS	288 TB (16 TB x 18)

\*Up to 225 Cameras with 1920x1080, 25FPS & 3 Mbps

## LENSEC LX266D NVA Chassis Views

### Front View (without bezel)

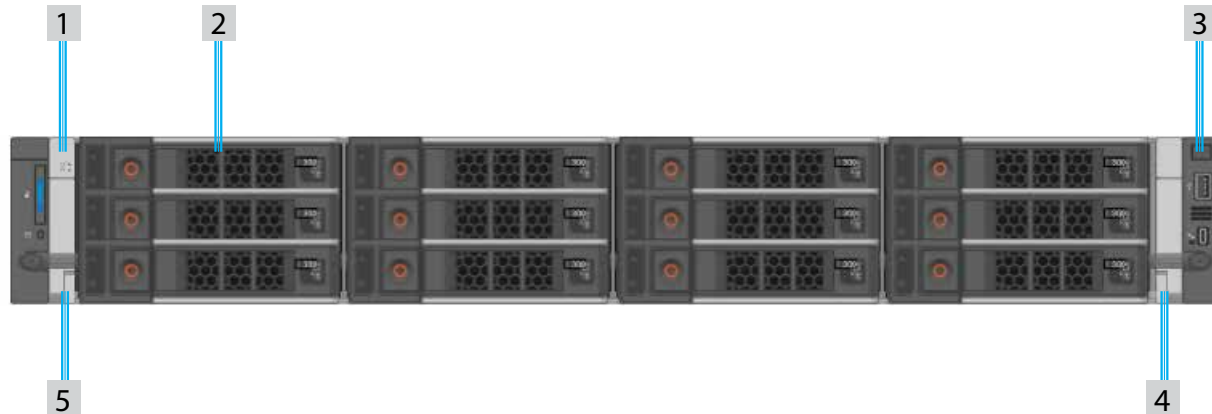


1. Left Control Panel
2. Drive slot

3. Right Control Panel
4. Right release latch

5. Left release latch

### Rear View

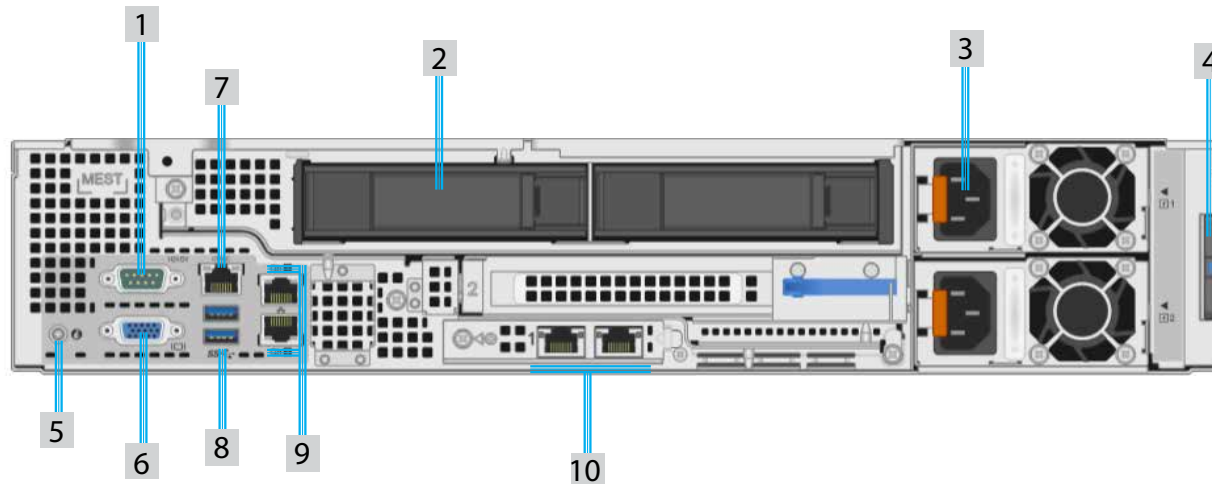

1. Serial port

2. Drive Slot

3. Power Supply unit

4. Information tag

5. System identification button

6. VGA ports

7. Out of Band management port (OOB)

8. USB 3.0 ports

9. Gigabit Ethernet ports

10. 10 Gbe BaseT ports

For more information regarding joint purchasing contracts or buying through schedules, please contact our LENSEC sales team [sales@lensec.com](mailto:sales@lensec.com)

Note: Hardware specifications are subject to change. Units provided will be equivalent to what is shown in this document.